


# Firestone UltraPly™ TPO XR

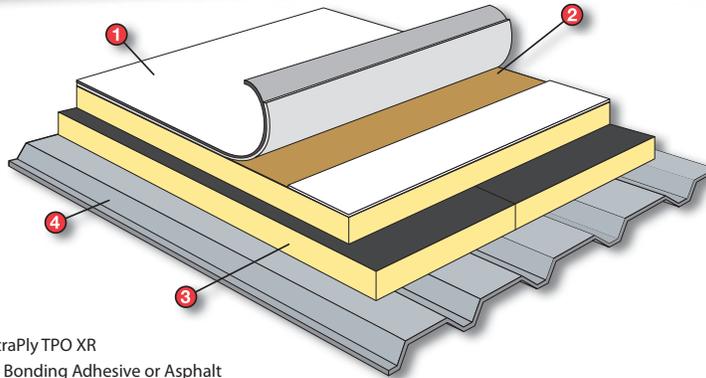

- 1 Firestone UltraPly TPO XR
- 2 Firestone XR Bonding Adhesive or Asphalt
- 3 Firestone ISO 95+ GL
- 4 Roof Deck

## UltraPly TPO XR 100 (45mil) and UltraPly TPO XR 115 (60 mil)

Internally and externally reinforced Thermoplastic Polyolefin Roofing Membrane with 55 mils of non-woven polyester fabric.

### FEATURES

- Can be adhered to a variety of substrates
- Available in 45 mil (UltraPly TPO XR 100) and 60 mil (UltraPly TPO XR 115)
- Available in white, tan and gray
- Excellent weatherability and strong resistance to UV, and common rooftop chemicals
- UL Class A and FM approvals
- Resistant to microbial growth
- Chlorine free with non-halogenated flame-retardants

### BENEFITS

- UltraPly™ TPO XR is ideally suited for fully adhered applications over new and existing substrates
- Lightweight membrane is ideal for reroof, retrofit and new construction applications eliminating the need for a cover board in many cases
- Superior cut and puncture resistance is enhanced with external polyester fabric
- Minimal disruption in reroofing applications



The **Next Generation** of Contractor-Friendly Products.

**Firestone**  
BUILDING PRODUCTS  
NOBODY COVERS YOU BETTER™

# Firestone Quality

The Firestone name is synonymous with quality, innovation and leadership. Through annual investments in research and development, we remain at the forefront of advances in roofing technology.

## Application Methods



UltraPly TPO XR can be fully adhered, using environmentally friendly XR Bonding Adhesive, applied with hot asphalt or mechanically attached.



**Firestone**  
BUILDING PRODUCTS

**NOBODY COVERS YOU BETTER™**

Firestone Building Products

250 West 96th St., Indianapolis, IN 46260

Corporate Office: 1-800-428-4442, ext. 7029 • 317-575-7000 • Fax: 317-575-7100

[www.firestonebpco.com](http://www.firestonebpco.com)

### International Offices:

Canada: 2835 Argentia Road, Unit #2 • Mississauga, ON L5N 8G6 • 888-292-6265 • [www.firestonebpco.ca](http://www.firestonebpco.ca)

Europe: Hermesstraat 2C - 1930 • Zaventem, Brussels, Belgium • +32 2 7114450 • [www.firestonebpco.com](http://www.firestonebpco.com)

Latin America: 8300 NW 53rd Street, Suite #106 • Miami, FL 33166 • 305-471-0117 • [www.firestonebpco.com](http://www.firestonebpco.com)



This green product printed on recycled paper using Soy Inks and manufactured using 100% Wind Power.

### Roll Width & Length:

- XR 100-10' (3 m) x 100' (30.5 m)
- XR 115-10' (3 m) x 100' (30.5 m)

### External Fabric:

- 55 mil (1.3 mm) 8 oz. non-woven polyester fabric

### Membrane Gauge:

- XR 100-45 mil (1.1 mm)
- XR 115-60 mil (1.5 mm)

### Internal Scrim:

- 9 x 9, weft-inserted 1,000 denier fully encapsulated polyester scrim

### Warranty:

- 15-year total system
- 20-year when using UltraPly TPO XR 115

### System Installation Options:

- Fully adhered with XR Bonding Adhesive or hot asphalt
- Mechanically attached

### Compatible Substrates:

- ISO 95+GL™ Poly Insulation
- DensDeck
- Woodfiber
- Plywood/OSB
- Uncoated smooth or granule surfaced APP or SBS modified bitumen
- Smooth or mineral surfaced BUR
- Lightweight cellular concrete

### Code Approvals:

- UL Class A
- FM approvals
- ASTM D6878 tested

CRRC Prod. ID 0608-0016

Please reference Firestone Building Products Technical Information Sheet (TIS) found at [www.firestonebpco.com](http://www.firestonebpco.com)